


# Automotive Safety 1

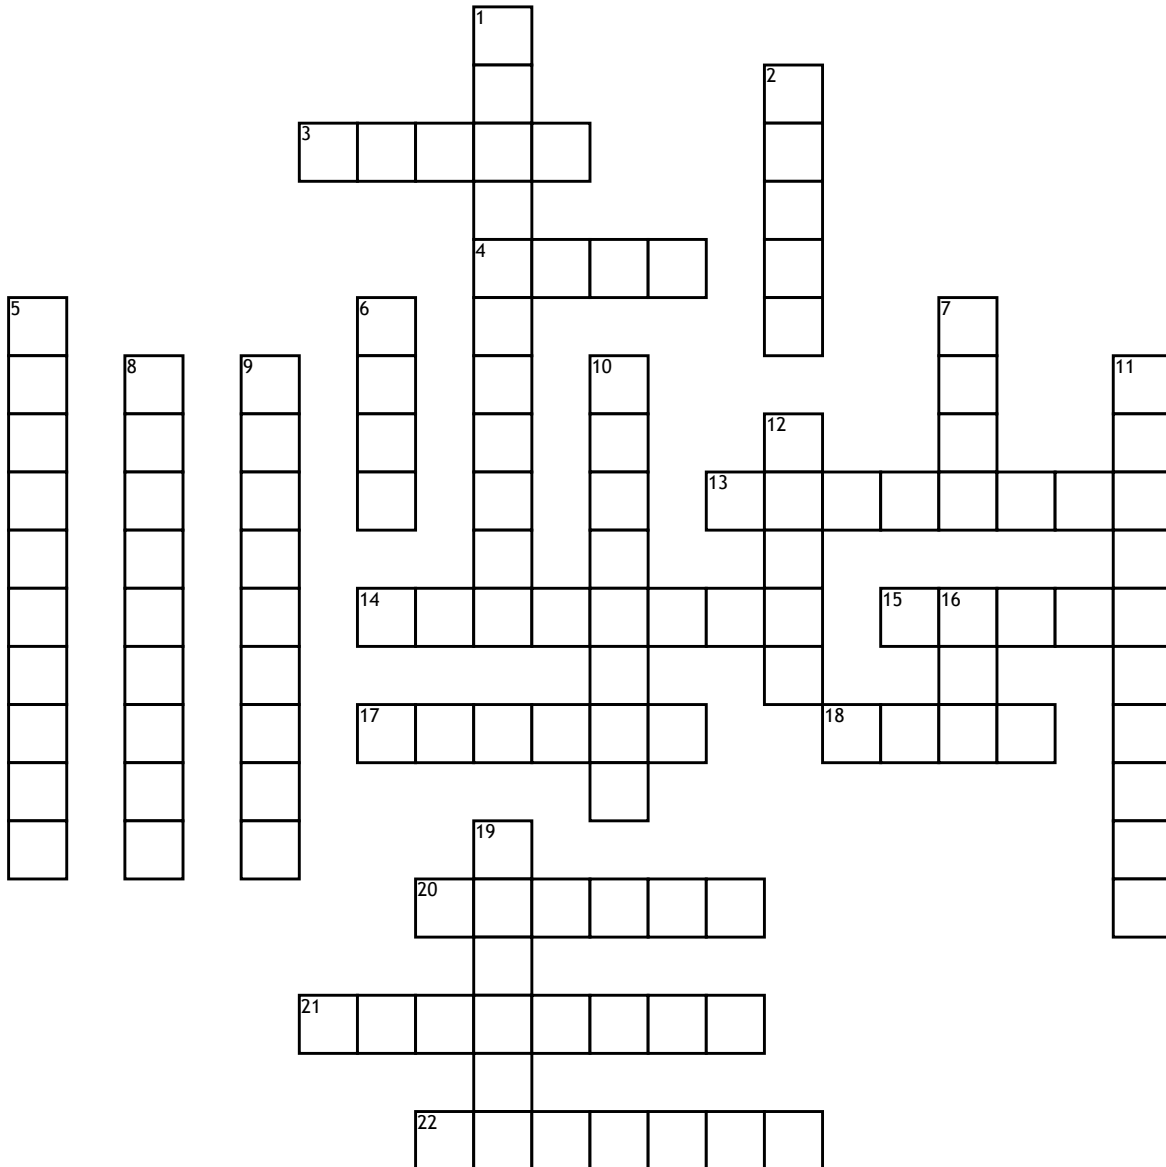

**Across**

- 3. What form of gasoline is the most dangerous?
- 4. Do not \_\_\_\_\_ to someone who is operating a machine.
- 13. The most common injuries in an automotive shop involve the \_\_\_\_\_ and \_\_\_\_\_.
- 14. Never use \_\_\_\_\_ to clean floors or parts.
- 15. Do not attempt to put out a gasoline fire with \_\_\_\_\_.
- 17. Disconnect the battery \_\_\_\_\_ cable before working on a vehicle electric system.
- 18. If a \_\_\_\_\_ is burning out of control, leave the area immediately and call for help.
- 20. If refrigerant from an air conditioning system contacts your skin or eyes it will \_\_\_\_\_ them.

- 21. Die \_\_\_\_\_ turn at speeds of up to 20,000 rpm. Be sure to use wheels that are rated for that high a speed.
- 22. Shut off and unplug the battery \_\_\_\_\_ before unhooking either of the cables.

**Down**

- 1. Keep oily materials separated from air to prevent \_\_\_\_\_ combustion.
- 2. The temperature at which a flammable liquid's vapors will ignite when brought into contact with an open flame is called the \_\_\_\_\_ point.
- 5. Before an \_\_\_\_\_ fire can be extinguished, the battery must be disconnected.,
- 6. Lift with your \_\_\_\_\_, not your back.
- 7. Stand to the \_\_\_\_\_ when starting the grinder.

- 8. Because they can develop force of from 20--40 tons, \_\_\_\_\_ presses can cause parts to explode.
- 9. Before opening a radiator, test for pressure in the system by \_\_\_\_\_ the top radiator hose.
- 10. When \_\_\_\_\_ sheet metal or large pieces of metal on the drill press, make sure they are clamped to the work table.
- 11. If you should become injured while working in the shop, inform your \_\_\_\_\_ immediately.
- 12. If caustic liquid gets into your eyes flush with \_\_\_\_\_, especially under the eyelids.
- 16. Compressed \_\_\_\_\_ can penetrate skin and must be used cautiously.
- 19. When an air impact \_\_\_\_\_ is used with a wobble socket, the socket can fly off if the tool is started when the socket is not on the bolt head.