


Name: _____

Date: _____

Clothing 3-4 Review

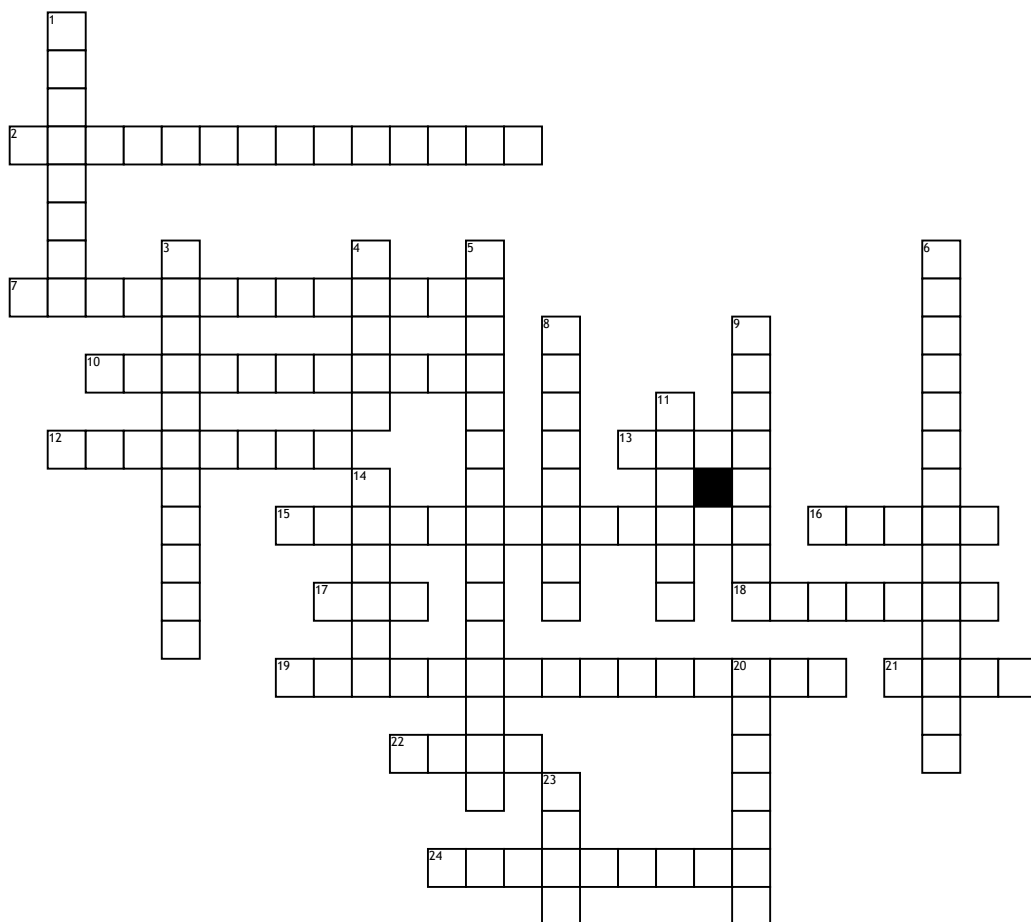

Across

2. double line on a pattern to indicate where alterations may be made
 7. distance from the cut edge to the stitch line
 10. extra layer/thickness of fabric used to provide shape and structure
 12. the person who will not read instructions and do your project for you!
 13. evenly distributing some fullness when joining two pieces of different sizes
 15. any method of finishing raw edges of seam allowances
 16. using an iron in order for fabric to lay flat or crease
 17. used for marking, found on stitching line

18. narrow, firmly woven finish along both lengthwise edges of the fabric

19. symbols for construction printed on the pattern

21. to transfer pattern instructions to the fabric, i.e. transfer dart markings

22. to cut away excess fabric on a seam allowance after the seam is stitched, usually to remove bulk

24. what you follow when laying out pattern pieces

Down

1. marking on pattern where fabric should be folded, i.e. center of dart

3. long stitches used to hold fabric pieces together temporarily

4. to bring notches or other construction markings on two pieces together

5. threads which run up and down the fabric, parallel to the selvage

6. threads that run across the fabric and are perpendicular to the selvage

8. the line designated for stitching the seam, generally 5/8" from the edge of fabric

9. cut edges of a length of fabric

11. piece of fabric used to finish edges such as necklines

14. placement of pattern pieces on the fabric for cutting, suggested in the pattern packet

20. V-shaped or diamond-shaped markings on a pattern at the cut line

23. small cut into the seam allowance almost to the stitch line

Word Bank

mark
 grainline
 ease
 press
 lengthwise grain

clip
 seamline
 match
 adjustment line
 pattern markings

trim
 dot
 selvage
 seam allowance
 crosswise grain

notches
 facing
 seam finishing
 cut edges
 fold line

interfacing
 Miss Mohr
 baste stitch
 layout