
Name:	Date:
-------	-------

Core 104 trade terms

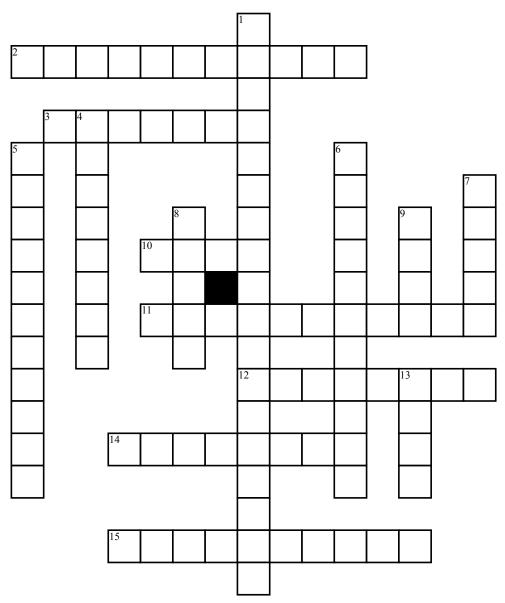

Across

- 2. keeps the tool running without finger on the trigger
- 3. made of carbide, used to make saw teek sharp and durable
- 10. 40 to 600, the higher the number the smoother the finish
- 11. a bit used to set the srew head below the surface of he wood
- **12.** a small t\T-shaped metal piece used to tighten chuck jaws bottomed hole

- **14.** a drill bit with a spiral tip used for boring holes in materials
- **15.** Bits designed to drill into brick, stone, or CMU,s

Down

- 1. Power that travels in two direction and obtained from wall electrical shock outlets
- **4.** Sandpaoer or other methof wearing away material
- **5.** a designed to drill a flat

- 6. to move in a back and forth motion in a straight line
- 7. smooth part of the drill bit that fits the chuck
- **8.** the end of the saw shaft where the blade is mounted
- 9. interupts current to avoid
- **13.** the channel made by the blade