


General Product Quality Policy and Electronic Assemblies Workmanship Guidelines QA-P-0003

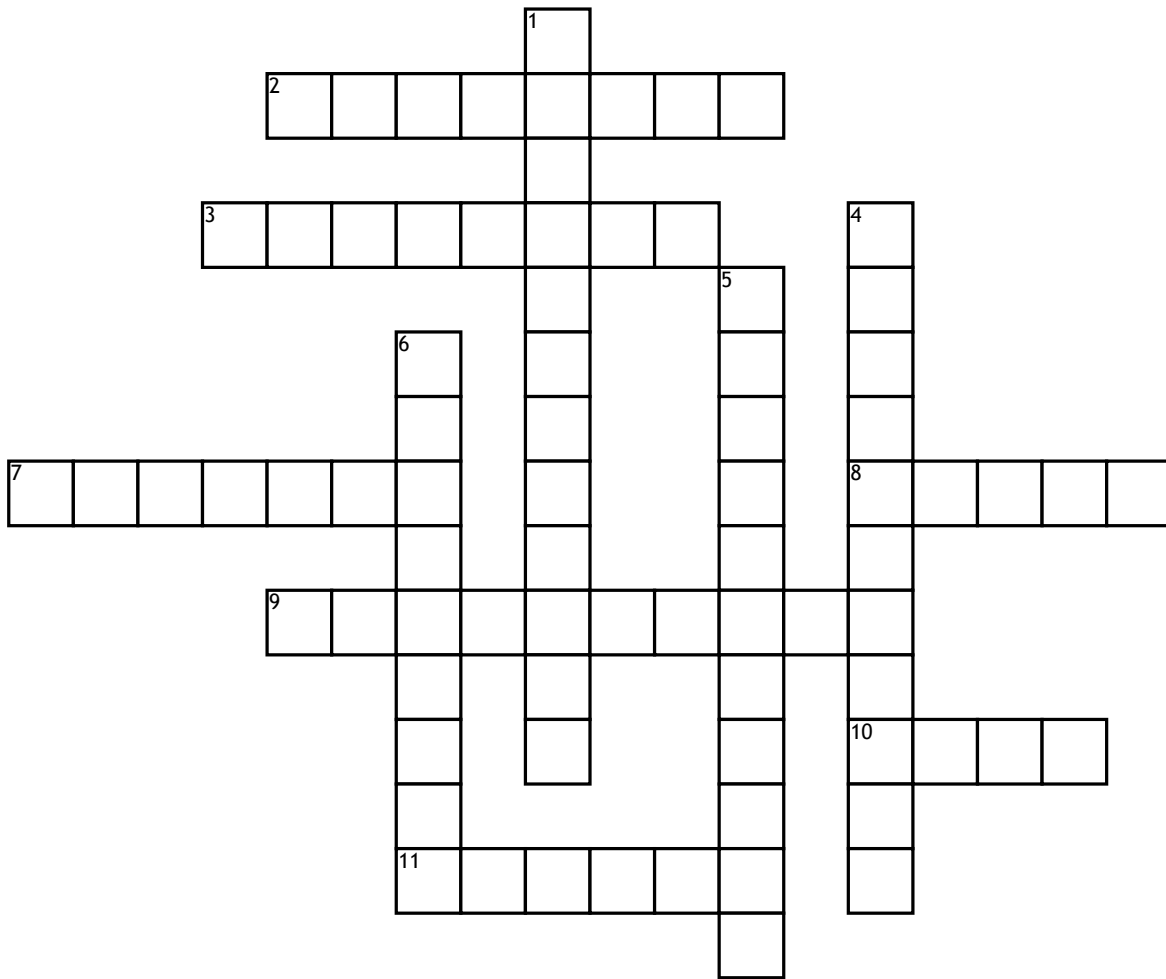

Across

- 2. Gloves and cots should stay in the PCBA process area and not used for _____ building activities.
- 3. The serial number provides unique identification of the year, month, and _____ the assembly was manufactured.
- 7. Label placement should be _____ on all similar boards
- 8. PCBs and PCBA,s must be handled by the _____ (but not edge connectors).
- 9. Touching the surfaces of PCB or PCBA with bare and unprotected hands prior to completion of production soldering process is _____.
- 10. "S" part assemblies shall have the _____ part number revision level

- 11. All hardware must be tight in accordance with any _____ specification provided by engineering drawing or ME instructions.

Down

- 1. Parts mounted in unusual positions due to _____ should be neat and secure.
- 4. Assembly drawing instructions relating to RTV shall take _____.
- 5. _____ coil leads must be positioned away from sharp edges of the pot core.
- 6. Part number labels are preferred to be positioned on the _____ side of the PC board