
## Ladder Safety Crossword

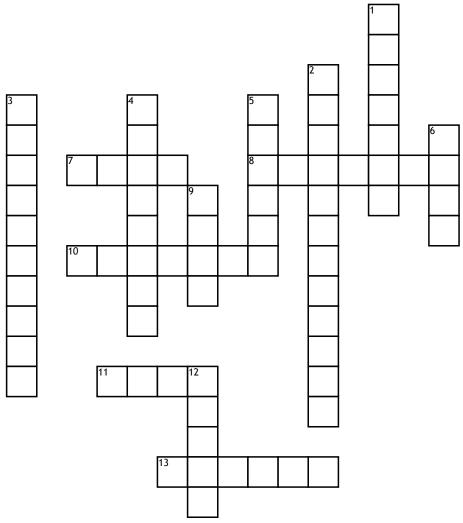

## **Across**

- 7. The base of the ladder should be 1 foot horizontally from the support point for every \_\_\_feet vertical height to the support point.
- **8.** Always choose the \_\_\_\_ ladder for the type of work you are doing.
- **10.** Always keep at least three points of \_\_\_\_ with a ladder,
- 11. Ladder accidents \_\_\_\_ 6,000 people each year.

- 13. Make sure you know the \_\_\_\_ limits of a ladder you are using. Down
- 1. Inspect a ladder before and after a job- don't use a \_\_\_\_ or unsafe ladder.
- 2. Instead of leaning or \_\_\_\_ reposition a ladder closer to the work you are doing.
- 3. When using a ladder, climb slowly and \_\_\_\_.
- **4.** Most ladders are made of wood, \_\_\_ and fiberglass.

- **5.** Use a tool \_\_\_\_ or wear a utility belt instead of carrying tools in hand when using a ladder.
- **6.** 2 most common types of ladders include: \_\_\_\_ and straight/extension.
- **9.** Never lean a ladder against a window pane or other \_\_\_\_ surfaces.
- **12.** Always place the base of a ladder on a firm, solid \_\_\_\_ surface.

## **Word Bank**

DAMAGED CONTACT WEAK FOUR LEVEL
ALUMINUM OVERREACHING STEP KILL CAUTIOUSLY
BUCKET WEIGHT CORRECT