
## Oil Change

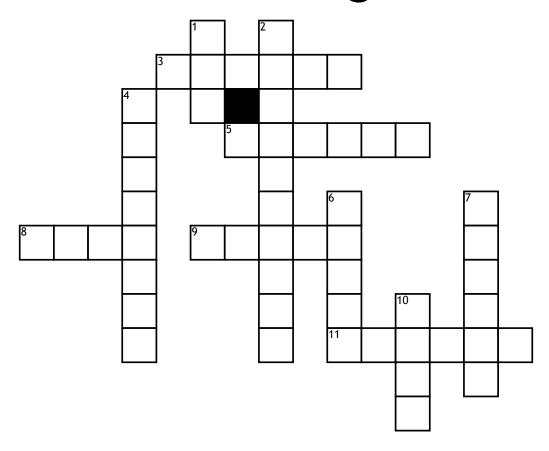

ACTOSS
--------

- **3.** Prevent a \_\_\_\_\_ by opening the oil cap and lifting the dipstick
- 5. Tool to remove the oil "plug"
- 8. To loosen the oil bolt, turn the bolt
- 9. Engage parking \_\_\_\_\_
- 11. Righty tighty, lefty \_\_\_\_\_

## <u>Down</u>

- 1. Tap the \_\_\_\_\_
- 2. The new o-ring needs to be \_\_\_\_\_
- **4.** Check the \_\_\_\_\_ to know if you put enough oil in
- 6. Park on a \_\_\_\_\_ surface
- 7. Use this to help you pour the new oil into the car
- 10. The oil "plug" in the oil pan is a

## **Word Bank**

WRENCH LUBRICATED

FUNNEL BOLT

LOOSEY DIPSTICK

LEFT VACUUM LEVEL CAP

**BRAKE**