


Name: _____ Date: _____ Period: _____

Pattern and Fabric Terms

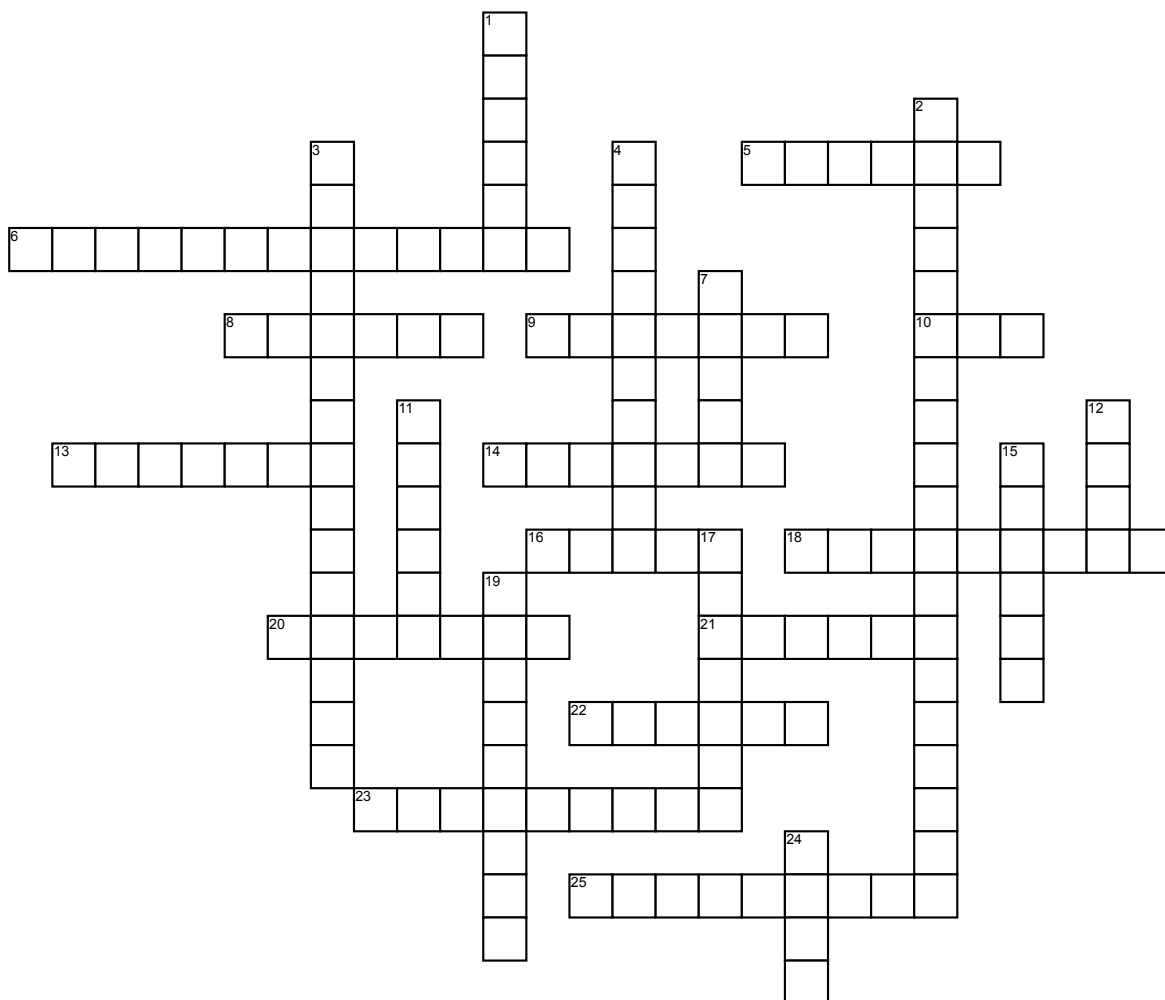

Across

5. As a rule, the crosswise grain is _____ than the lengthwise grain.
 6. Secures the beginning and end of a stitched seam
 8. Trim out your pattern _____ according to your size.
 9. Your pattern may need to be _____ before cutting out of fabric.
 10. The finished edge of a garment
 13. Where fabric was cut from the bolt
 14. Don't forget to buy _____, including thread.
 16. Use an iron to _____ as you sew
 18. As a rule, the lengthwise grain is the _____.

20. A notion you may need besides thread
 21. Diagram showing how to put the pieces on the fabric
 22. Tool for cutting our pattern pieces from fabric
 23. Threads which run perpendicular to the selvage
 25. $5/8"$ = Standard seam _____

Down

1. Flannel fabric is made of this fiber
 2. The line used to alter pattern length
 3. Gives information on how much fabric to buy, notions, garment description, etc.
 4. Threads which run parallel to the selvage

7. Most pattern pieces are placed on the fabric's lengthwise _____.
 11. Formed by the weaving process: directional _____
 12. Diagonal line on fabric which is very elastic
 15. Stitch used to finish seam allowances and prevent raveling
 17. The finished woven edge of fabric
 19. The side of the fabric worn on the outside of a garment
 24. It is necessary to _____, dry, and iron your fabric before cutting out pieces.