


Name: \_\_\_\_\_

Date: \_\_\_\_\_

# java CrossWord2

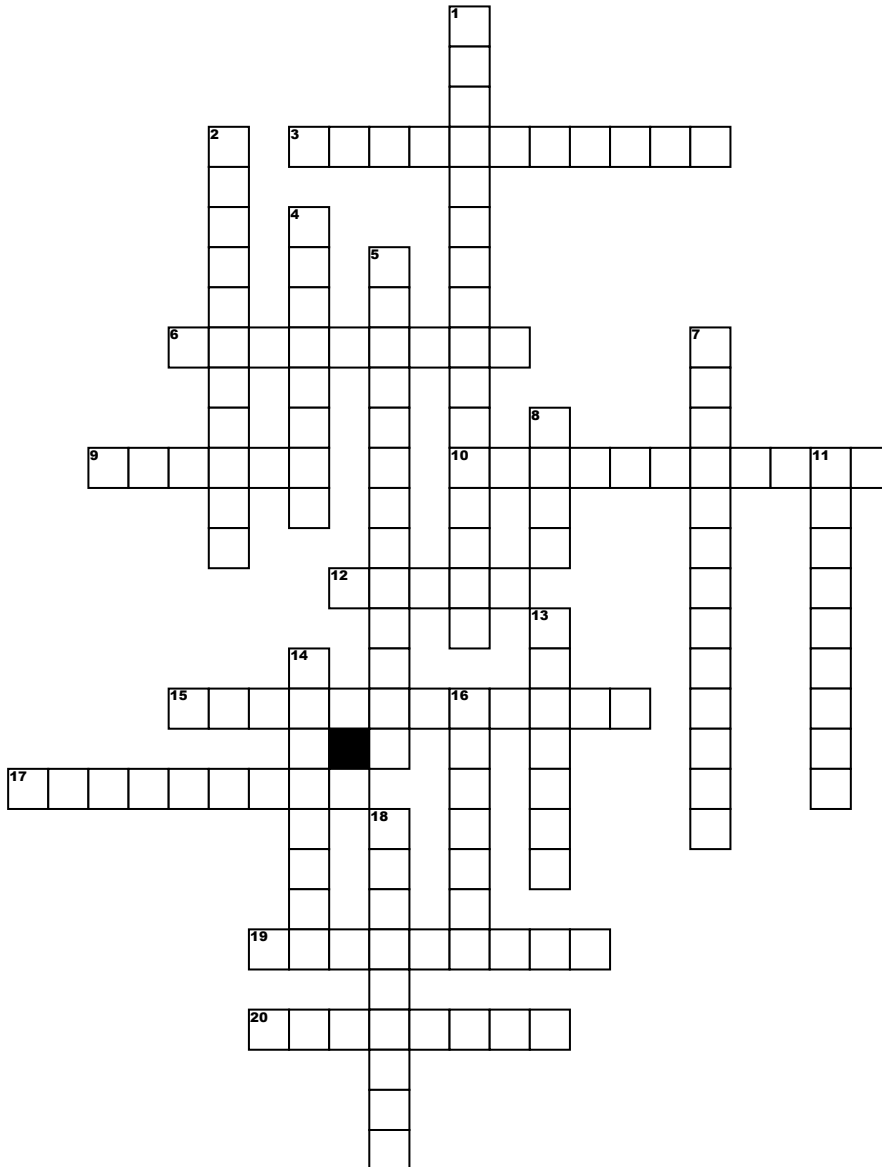

## **Across**

3. The preferred class for output to a text file is \_\_\_\_\_.

6. \_\_\_\_\_ members are accessible from object and the sub class objects

9. \_\_\_\_\_ declares a class variable that is to be shared among all instances.

10. the term \_\_\_\_\_ refers to a way of organizing classes that share properties.

12. \_\_\_\_\_ is the java compiler.

15. abstract class and interface are used for runtime \_\_\_\_\_

17. \_\_\_\_\_ members are accessible from object and the sub class objects.

19. Array is \_\_\_\_\_ data type

20. A method declared with \_\_\_\_\_ modifier cannot be overridden.

## **Down**

1. An array that uses more than one index is called a \_\_\_\_\_ array.

2. A \_\_\_\_\_ is a special kind of method used to initialize objects

4. A \_\_\_\_\_ variable is a data item that belongs to an object.

5. Another term for \_\_\_\_\_ is information hiding.

7. Java supports \_\_\_\_\_ programming.

8. \_\_\_\_\_ is a reference to the current object on which the method was invoked.

11. \_\_\_\_\_ tool is used for viewing HTML files.

13. Java uses \_\_\_\_\_ to represent characters.

14. The output of the Java compiler is known as \_\_\_\_\_

16. A \_\_\_\_\_ is a collection of classes and interfaces.

18. . An \_\_\_\_\_ is an object that is generated when a run time error occurs